


5 Zones mixer amplifier MG-100F/150F/200F/300F/400F/500F

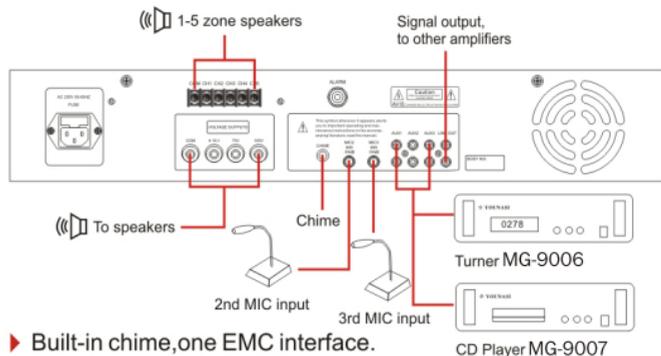

- ▶ Built-in chime, one EMC interface.
- ▶ MIC 1 has priority function.
- ▶ Has 6 input channels, 3 MICs, and 3 AUX input, one line output each channel can be adjusted individually.
- ▶ Has 5 zones, any for your selection for the speakers.
- ▶ Volume is controlled individually, has treble and bass adjustment.

Model	MG-130F	MG-600F	MG-100F/150F/200F/300F/400F/500F
Power supply	AC 230V	AC 230V	AC 230V
Output way	70V-100V 4-16 Ω	70V-100V 4-16 Ω	70V-100V 4-16 Ω
Power consumption	150W	670W	160W/210W/290W/370W/470W/570W
Rated output power	100W	620W	120W/160W/240W/320W/420W/520W
Net weight	7.91Kg	19.25KG	10.95/11.48/12.82/14.15/15.25/17.28Kg
Gross weight	9.06Kg	21.12KG	12.93/13.45/14.78/16.13/17.29/19.24Kg
Product dimension	484X343X88mm	484X420X132mm	484X418X88mm
Packing dimension	540X410X170mm(1PC)	560X520X240mm(1PC)	555X490X190mm(1PC)