

Integrated Mount Tester

GCB01-B7






Specifications

| Interface | |
|-------------------------|--|
| Network | 4 * RJ45 10M/100M Base-TX Ethernet Network Port 1 Support POE (IEEE802.3af) Output Network Port 4 Support PSE Voltage Test |
| Voltage Test | 1 * PSE Voltage Test(PSE voltage detection Range : 1V~56V; IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt) 1 * DC voltage Test(DC voltage detection Range : 1V~56V) |
| Network | |
| WiFi | 2.4G Wi-Fi (IEEE802.11b/g/n) |
| Structure / Environment | |
| Battery Capacity | 18650 lithium battery, 7500mAH |
| Power Input | 1 *DC 5V/2A max, type-c |
| Power Output | 1 *DC 12V/1A output; 1 *DC 5V/1A output, type-A |

| | |
|---------------------|--|
| LED indicator | System indicator, WiFi indicator, Battery indicator |
| Dimensions | 130 × 85 × 33mm (5.1" × 3.3" × 1.3") |
| Working Environment | -20°C~60°C(-4°F ~ 140°F), Humidity: ≤95% RH (non-condensing) |
| Button | |
| Reset Button | Support |

Dimensions

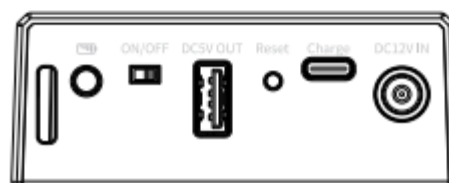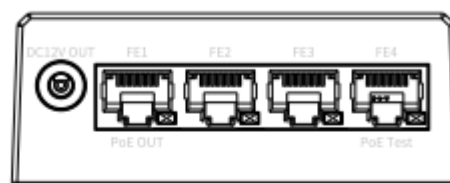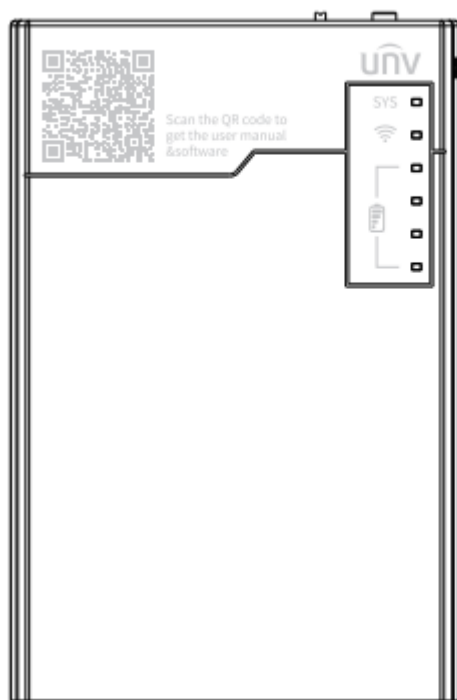

Zhejiang Uniview Technologies Co.,Ltd.

Building No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, Zhejiang Province, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.