



TC-C34XN Spec:I3/E/Y/2.8mm/V5.0

## 4MP Fixed Turret Camera

Spark



### KEY FEATURES

- Metal+Plastic Housing
- Up to 2560x1440@20fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F1.6
- Smart IR, IR Range: 30m
- Built-in Mic
- Operating Conditions -30°~60°, 0~95% RH
- POE



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048

## SPECIFICATIONS

| Camera               |   |
|----------------------|---|
| Image Sensor         | 1/3"  |
| Signal System        | PAL/NTSC  |
| Min. Illumination    | Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR  |
| Shutter Time         | 1s to 1/100,000s  |
| Day&Night            | Dual IR Cut Filter with Auto Switch   |
| WDR                  | Digital WDR   |
| Lens                 |   |
| Lens Type            | Fixed   |
| Focal Length         | 2.8mm   |
| Lens Mount           | M12   |
| Aperture Range       | F1.6,Fixed  |
| Field of View        | Horizontal field of view:92.8°;<br>Vertical field of view:52.8°;<br>Diagonal field of view:104.8° |
| Illuminator          |   |
| IR LEDs              | 2   |
| IR Distance          | Up to 30m   |
| Wavelength           | 850nm   |
| White LEDs           | N/A   |
| Compression Standard |   |
| Video Compression    | S+265/H.265/H.264B/H.264M/H.264H  |
| Video Bit Rate       | 32kbps~6Mbps  |
| Audio Compression    | G.711A/G.711U   |
| Audio Sampling Rate  | 8kHz  |
| Image                |   |
| Max. Resolution      | 2560x1440   |
| Main Stream          | PAL:20fps(2560x1440,2304x1296,1920x1080,1280x720)   |
|                      | NTSC: 20fps(2560x1440,2304x1296,1920x1080,1280x720)   |
| Sub Stream           | PAL:20fps(704x576,704x288,352x288,640x360)  |
|                      | NTSC: 20fps(704x480,704x240,352x240,640x360)  |
| Third Stream         | N/A   |



|                         |   |
|-------------------------|---|
| Image Setting           | Saturation,brightness,contrast,sharpness,adjustable by client software or web browser                                       |
| Image Enhancement       | BLC/3D DNR/HLC  |
| ROI                     | N/A   |
| OSD                     | 16*16/32*32/48*48/64*64,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions                                       |
| Picture Overlay         | N/A   |
| Privacy Mask            | Yes,4 regions   |
| Defog                   | Yes   |
| Feature                 |   |
| Alarm Trigger           | IP Address Conflict,Motion Detection  |
| Video Analytics         | N/A   |
| Network                 |   |
| ANR                     | N/A   |
| Protocols               | HTTP,TCP/IP,UDP,ICMP,DHCP,DNS,NTP,IPv4,Telnet,RTSP  |
| System Compatibility    | CGI   |
| Remote Connection       | 2   |
| Client                  | Easy7,EasyLive Plus   |
| Web                     | IE,Firefox,Edge,Safari,Chrome   |
| Interface               |   |
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port  |
| Audio I/O               | N/A   |
| Alarm I/O               | N/A   |
| Built-In Mic            | Yes   |
| Built-In Speaker        | N/A   |
| Reset Button            | N/A   |
| On-board storage        | N/A   |
| General                 |   |
| Web Client Language     | 12 languages<br>English, Arabic, Italian, Spanish, Japanese, Vietnamese, Thai, Turkish, Russian, Polish, Portuguese, French |
| Operating Conditions    | -30°C~60°C,0~95%RH  |
| Power Supply            | POE,802.3af   |
| Power Consumption       | ≤5W   |



|                     |                      |
|---------------------|----------------------|
| Protection          | N/A                  |
| Heater              | N/A                  |
| Boundary Dimensions | 117mm(D)×96mm(H)     |
| Package Dimensions  | 138(L)138(W)110(H)mm |
| GrossWeight         | 0.34kg               |
| NetWeight           | 0.24kg               |


\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.



## AVAILABLE MODEL

TC-C34XN SPEC: I3/E/Y/2.8MM/V5.0

## DIMENSIONS (Unit: mm)

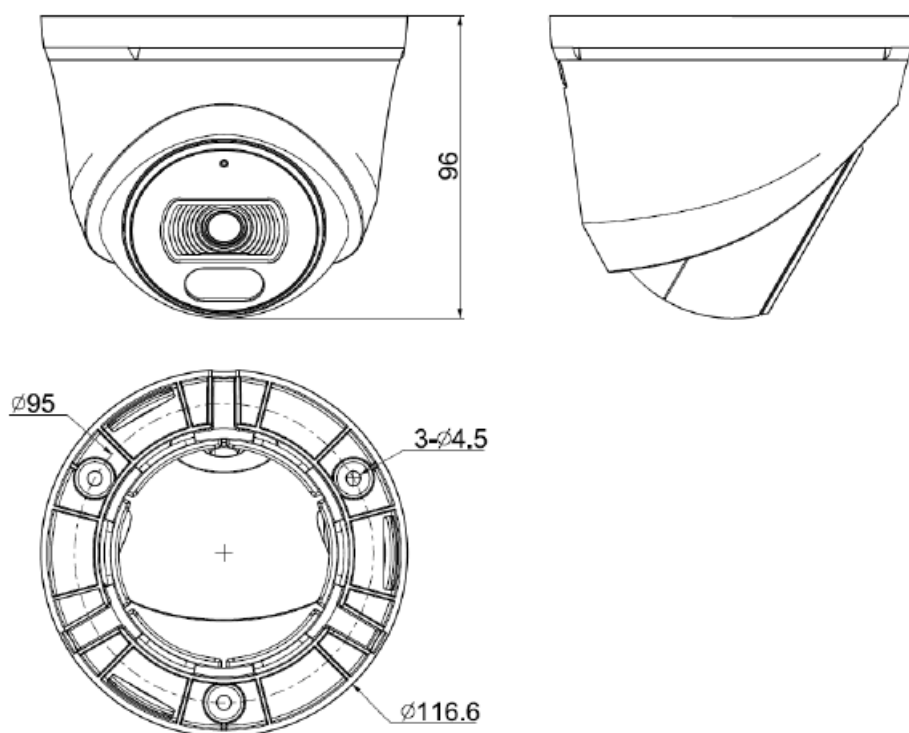

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048