

5 zones mixer amplifier with individual volume control

MG-2060SU/MG-2080SU/MG-2120SU/MG-2200SU/2300SU



Products characteristics


- ▶ Two channels signal input,Two lines signal input,one line signal output,
- ▶ 4--16 Ω Fixed resistance output, 70V/100V Level pressure output,
- ▶ Microphone 1 input priority,
- ▶ The output of overheating,overload,short circuit,alarm protection (The light will be opened)
- ▶ 5 zones with individual volume control output
- ▶ Mute function

MG-2060SU/MG-2080SU/MG-2120SU/MG-2200SU/2300SU Front Panel——



MG-2060SU/MG-2080SU/MG-2120SU/MG-2200SU/2300SU Rear Panel——

Connection way

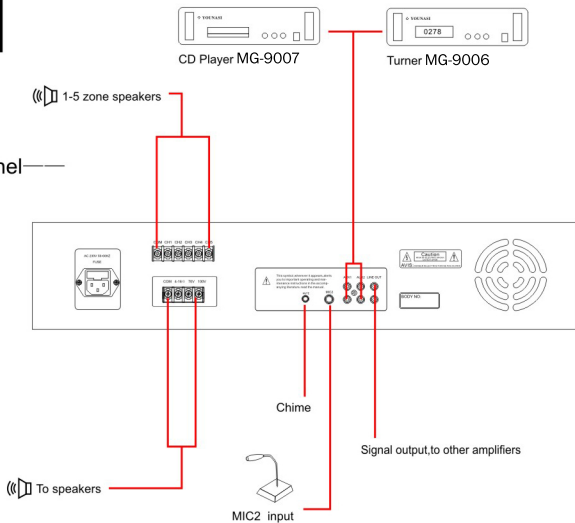

Specifications:

Model NO	MG2060SU	MG2080SU	MG-2120SU	MG-2200SU	MG-2300SU
Rated power output	60W	80W	120W	200W	300W
Mode of output	4--16Ω , 70V/100V				
AUX output	600Ω 1V (0db)				
Input	MIC1,2 :600Ω 2.0--4.0MV, AUX1,2:15KΩ 775MV imbalance				
Frequency response	80Hz-16KHz (±3db)				
Harmonic distortion	Less than 0.1% at MIC1and 2:66dB. Aux1and 2:70dB				
SNR	Microphone1and 2:66dB Aux1and 2:70dB				
Protection	Overheating, overload,short circuit				
Mute function	MIC 1 signal controls other input signals				
Tone adjustment	Woofer:±10dB at 100 Hz, tweeter:±10dB at 15KHz				
Power supply	AC 220V-240V/50-60Hz				
Power dissipation	90W	120W	180W	280W	430W
Gross weight	6.23KG	6.72KG	7.02KG	--KG	8.88KG
Net weight	5.18KG	5.66KG	5.95KG	--KG	7.83KG
Product dimension	MG-2060SU/2080SU/2200SU/2300SU :431x85x81mm				
Packing dimension	MG-2060SU/2080SU/2200SU/2300SU :540x410x170mm(1PC)				